



DESIGNING IN CONTEXT OF COMPLETE STREETS

DESIGN Module 3

Design for Non-
motorized Modes
Along the Road

WALKING ALONG THE ROAD

Shoulders and Sidewalks

- Walking along the road accounts for 10-15% of fatal pedestrian crashes:
 - Fewer in urban areas
 - More in rural areas
- They're easily preventable



- Paved shoulders reduce pedestrian crashes by 70% (CRF)
 - CMF = 0.3
 - Gan et al. study
- Sidewalks reduce pedestrian crashes by 88% (CRF)
 - CMF=0.12
 - McMahon Study

WALKING ALONG THE ROAD

Shoulders enhance safety for all users



For motorists: room to avoid crashes

WALKING ALONG THE ROAD

Shoulders enhance safety for all users



For bicyclists: a place to ride

WALKING ALONG THE ROAD

Shoulders enhance safety for all users



For pedestrians: a place to walk

CMF = 0.3 (CRF = 70%)



Walking Along the Road: Canyonville OR

At a certain point, sidewalks are needed




Walking Along the Road: Manitou Springs CO

“Goat trail” indicates sidewalks are needed

Quote from 2011 AASHTO Green Book 4.17.1 Sidewalks

The 2011 AASHTO “Green Book” states:
“Sidewalks are an integral parts of city streets”

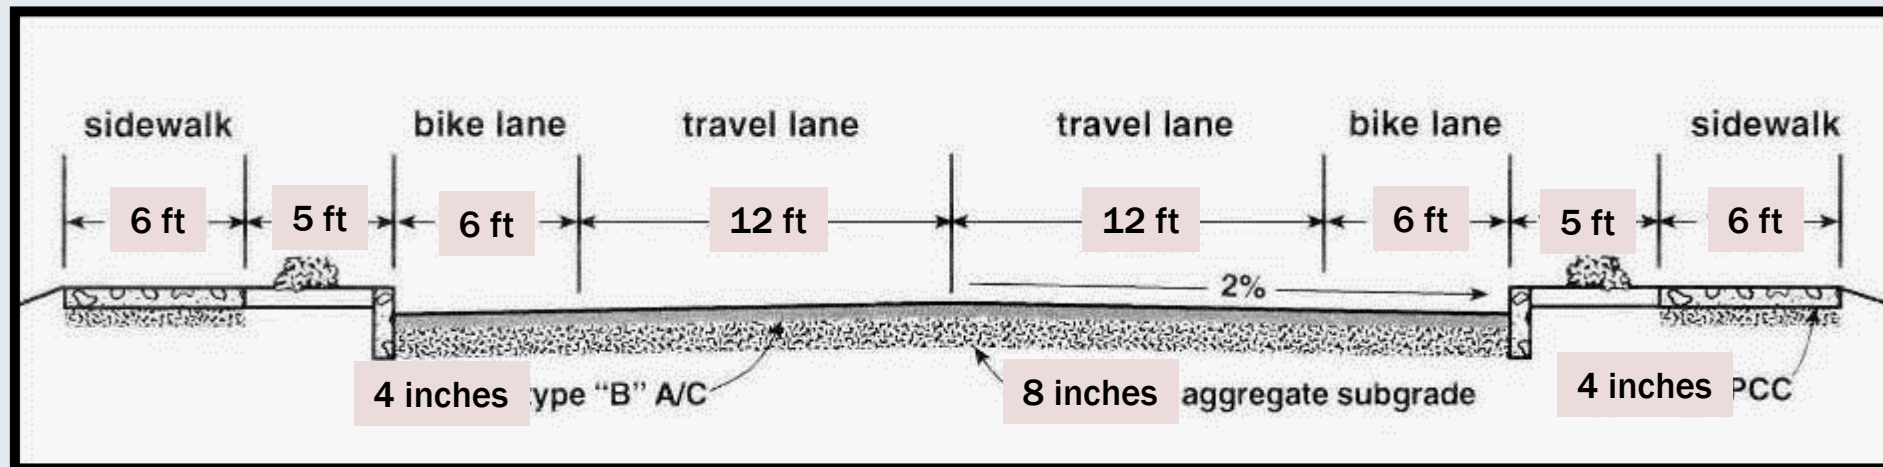

Sidewalks are not added to streets, they are part of the street



Walking Along the Road: Bellevue WA

Sidewalks reduce pedestrian crash risk by 88%

WALKING ALONG THE ROAD

Curbs & sidewalks slow traffic more than speed limit signs.




Sidewalks define an urban street



WALKING ALONG THE ROAD

Discussion:
Why are sidewalks discontinuous?



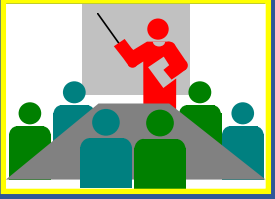

WALKING ALONG THE ROAD

Discussion:
Why are sidewalks
on one side not
okay?



Brawley CA

Answer: Pedestrians walk in street, or cross twice

WALKING ALONG THE ROAD

Sample implementation strategy to retrofit existing streets with sidewalks.



Develop a program to fill in missing sidewalks over 20 years

WALKING ALONG THE ROAD




Duck, NC

No barrier between pedestrians and traffic, but a painted buffer is provided.

SIDEWALK - ZONE SYSTEM DESIGN

The sidewalk corridor extends from the edge of roadway to the right-of-way and is divided into 4 zones:


- Curb zone
- Furniture zone
- Pedestrian zone
- Frontage zone

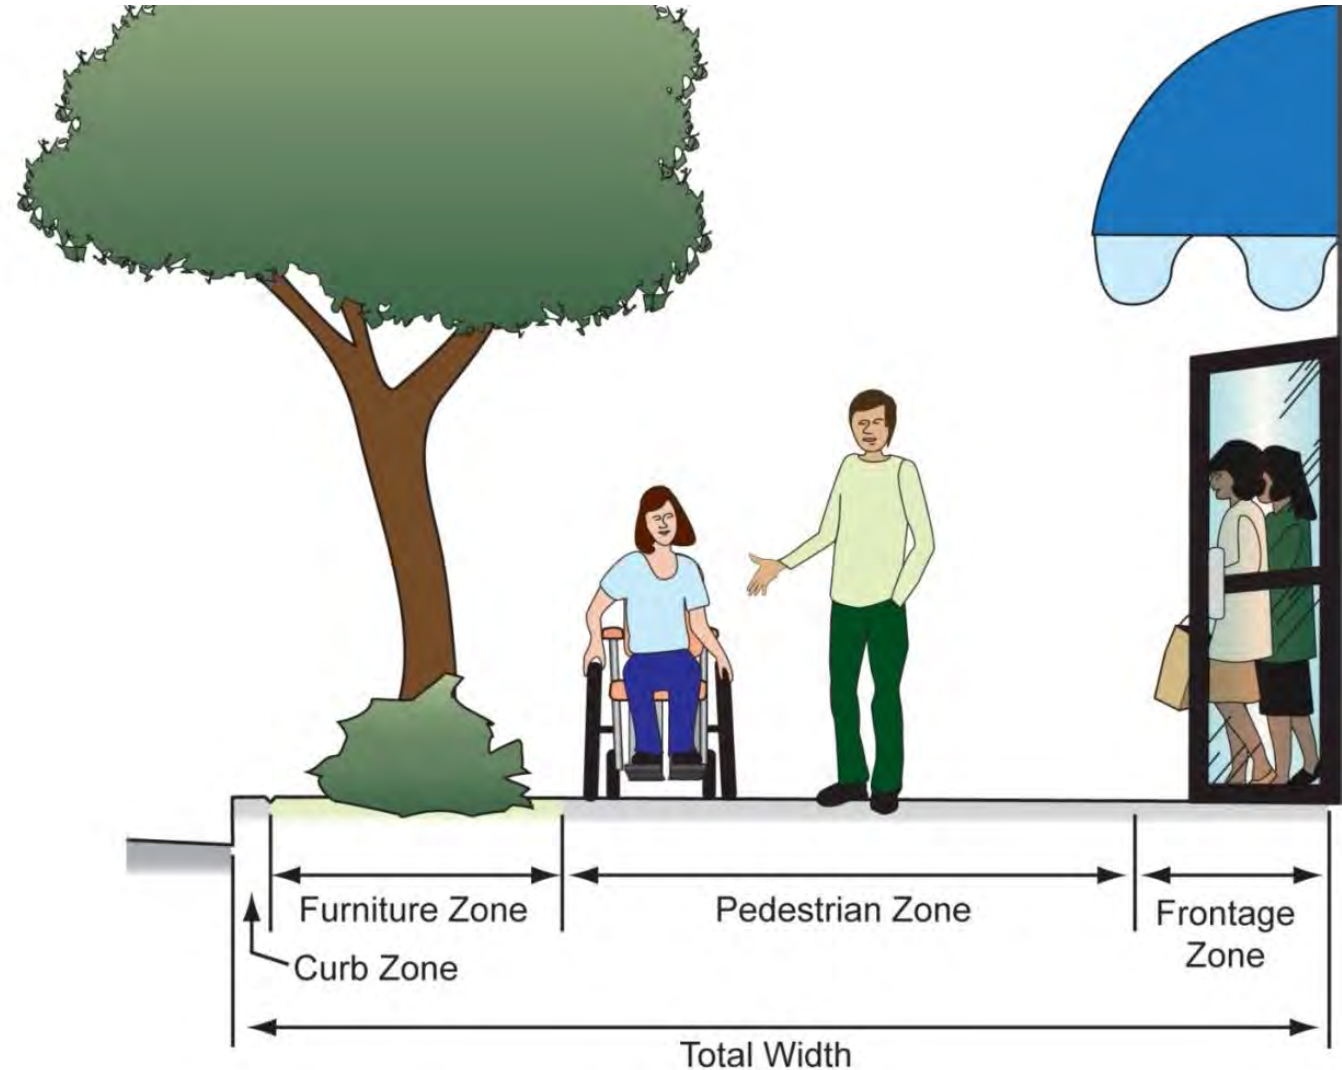

SIDEWALK - ZONE SYSTEM DESIGN

Curb Zone

Typically 6 inches

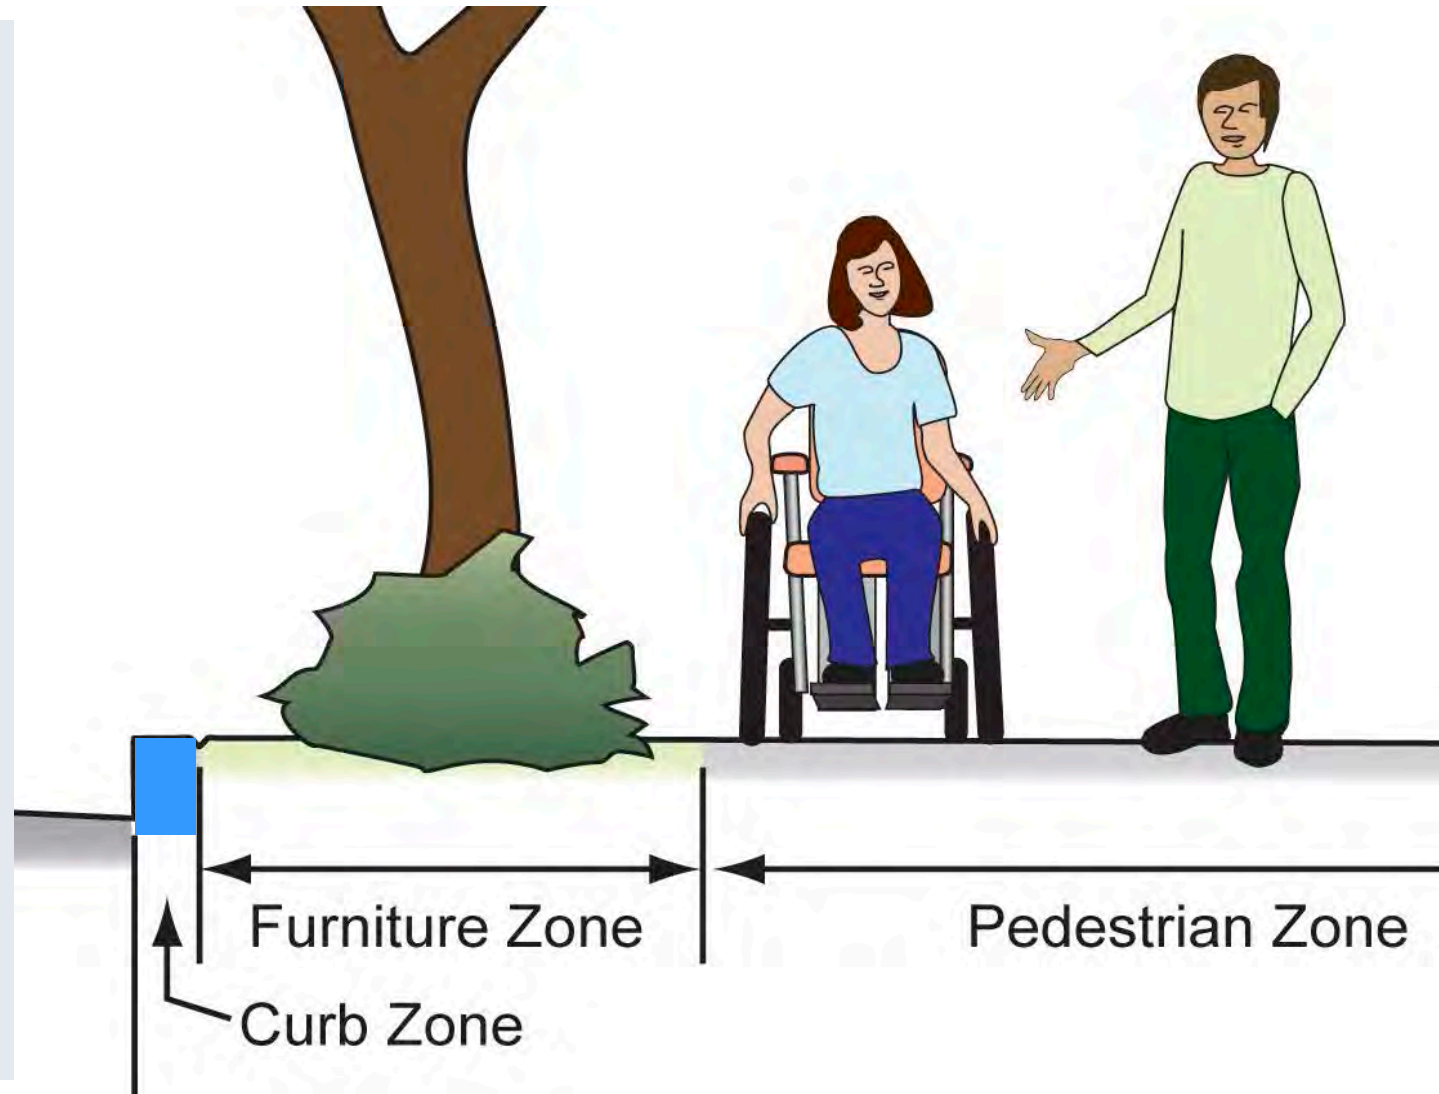




Sidewalk Zone System Design: Sacramento, CA

Why the curb zone matters: Sloping mountable curbs are inappropriate on local streets

SIDEWALK - ZONE SYSTEM DESIGN

Furniture Zone

- Local or collector streets 2 to 4 ft
- Arterial or major streets 4 to 6 ft

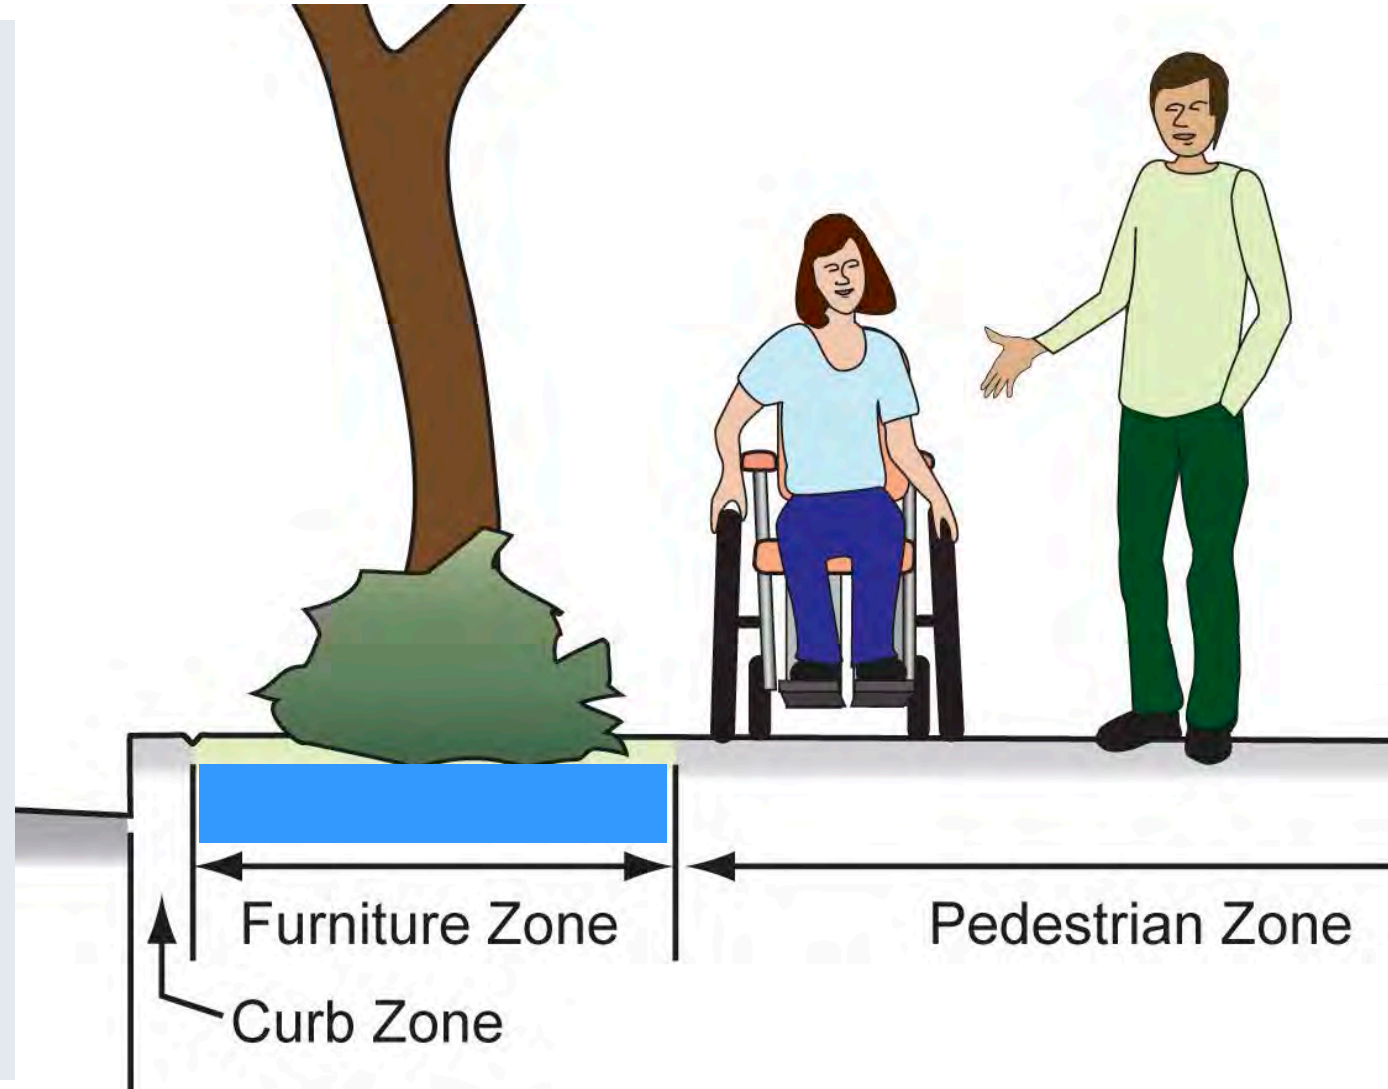



Sidewalk Zone System Design: Jacksonville OR

The furniture zone keeps the sidewalk clear



Sidewalk with furniture zone is pleasant to walk on




Pedestrian Zone System Design: Corvallis OR

Planter strip helps define driveways, it's easier for drivers to find them and they're more likely to yield to pedestrians

SIDEWALK - ZONE SYSTEM DESIGN

Pedestrian Zone

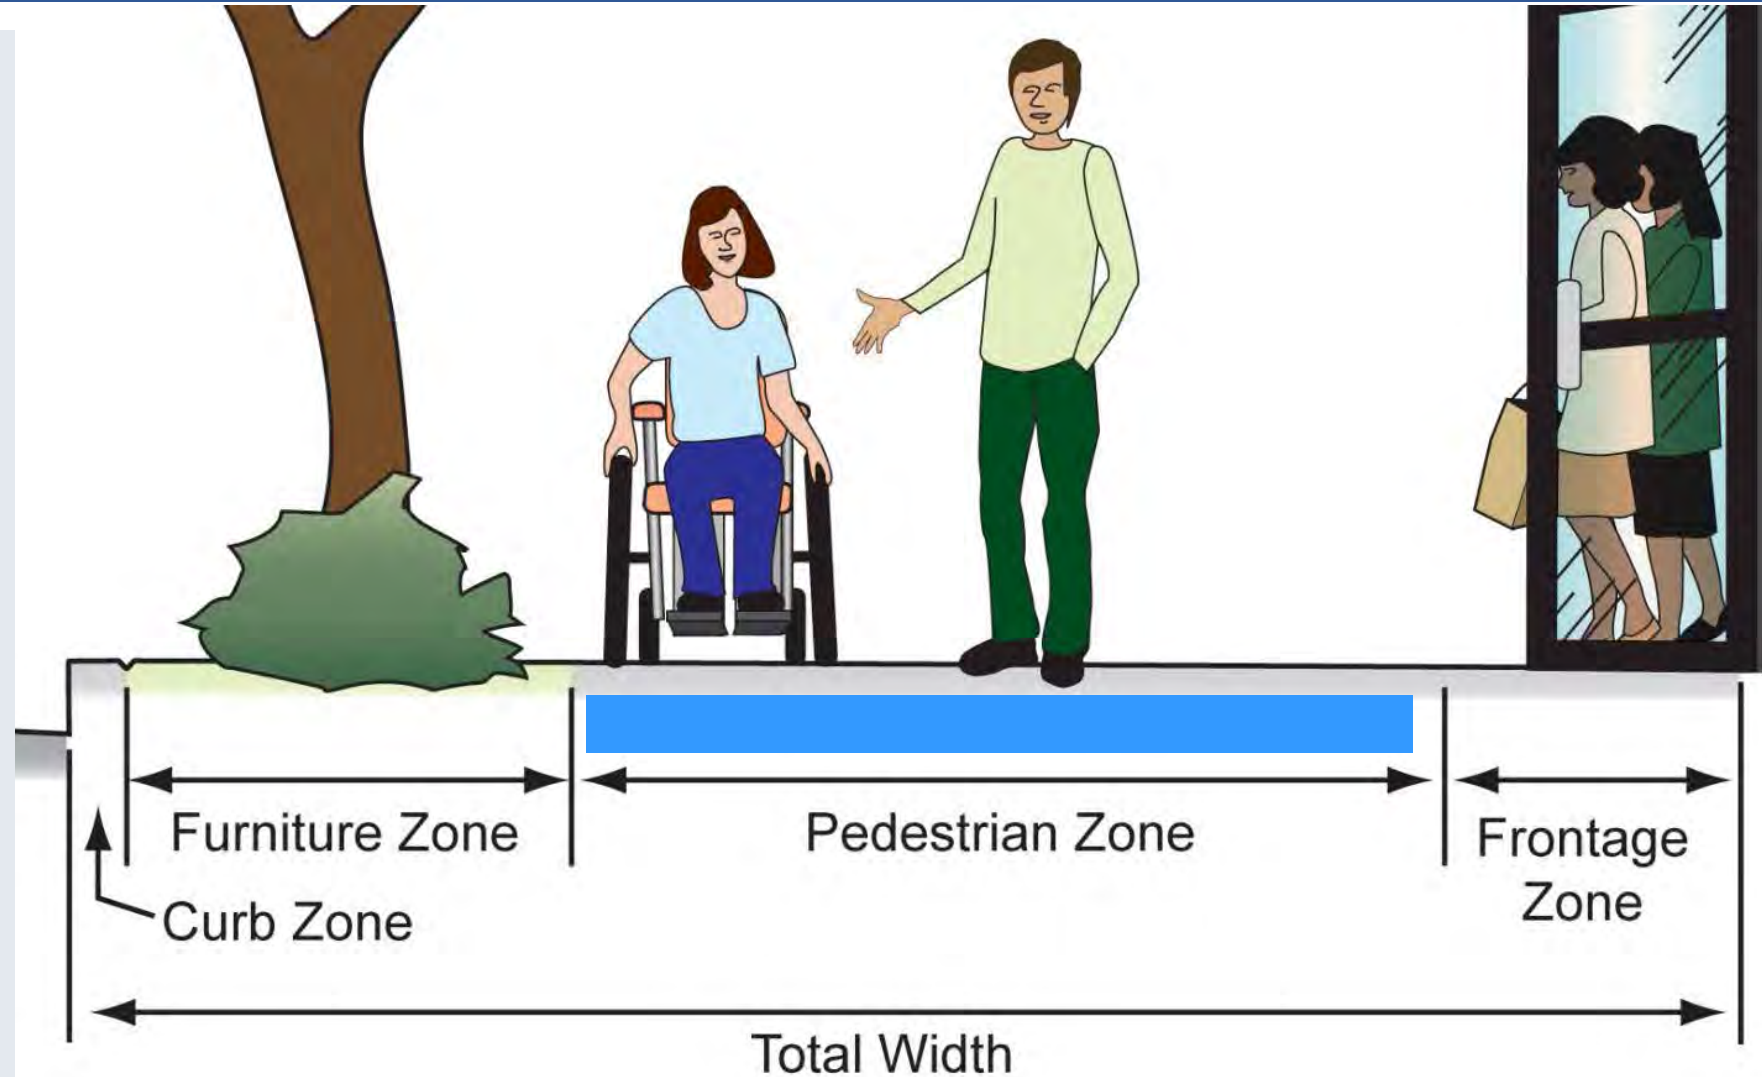



Pedestrian Zone System Design: Austin, TX

Sidewalk should be as wide as needed to serve anticipated pedestrian use (use HCM ped LOS)




Pedestrian Zone System Design: Silverton, OR

Randomly placed street furniture clutters sidewalk

SIDEWALK - ZONE SYSTEM DESIGN

Frontage Zone

- Doors, planters, etc...
 - 3 feet
- Café seating
 - 8 feet

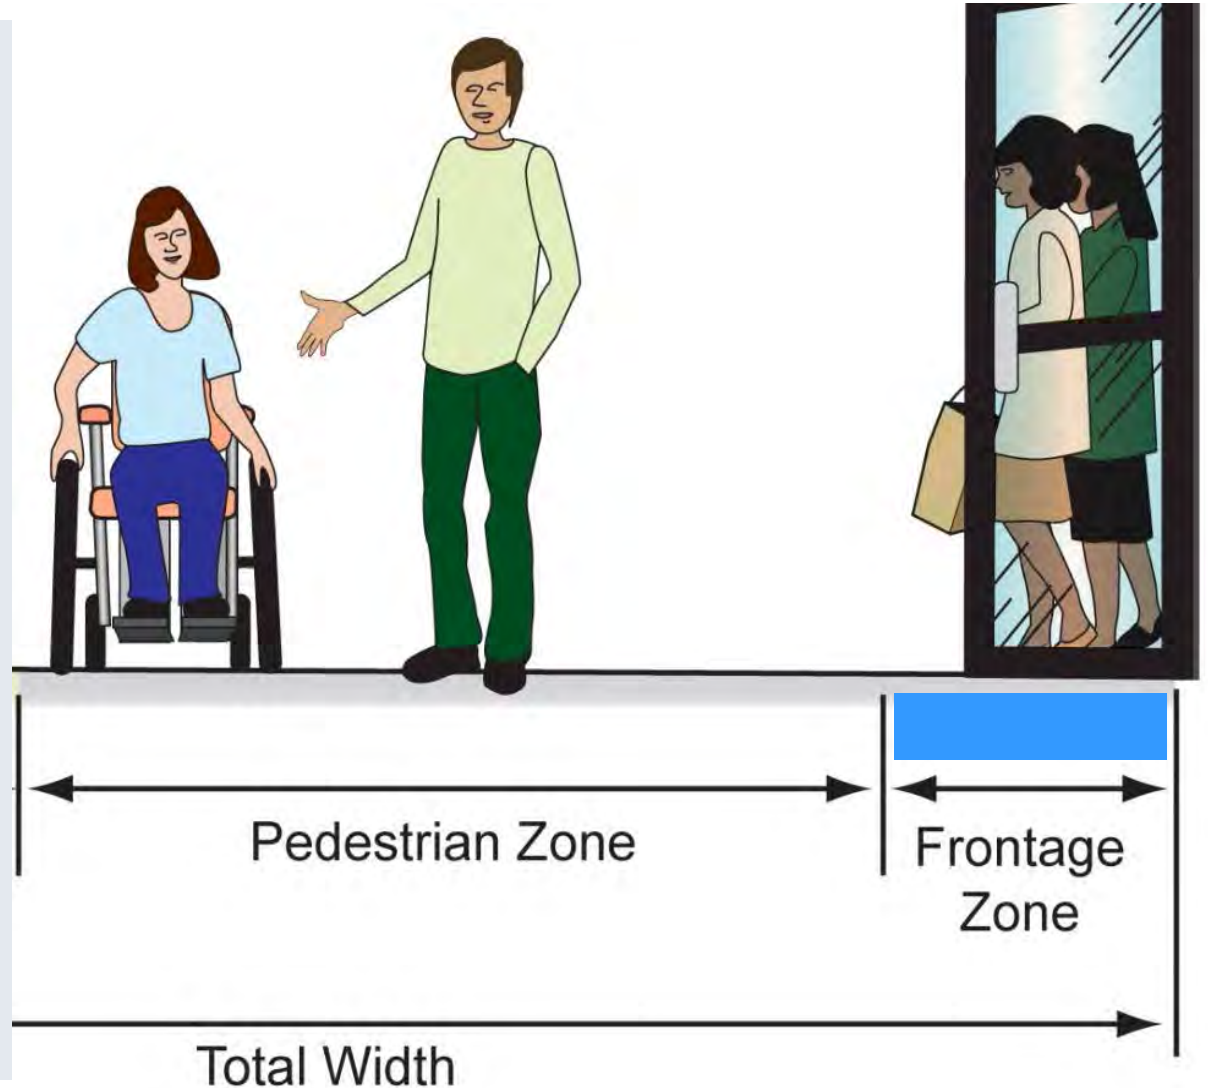



Pedestrian Zone System Design: Madison WI

An interesting facade makes narrow sidewalks feel wider




Fence placement and type impacts pedestrian comfort: the sidewalk on the left is wider, but feels narrow due to high and adjacent chain link fence.

Take into account “shy distance”


DRIVEWAYS

Driveways are the source of most conflicts with motor vehicles on sidewalks




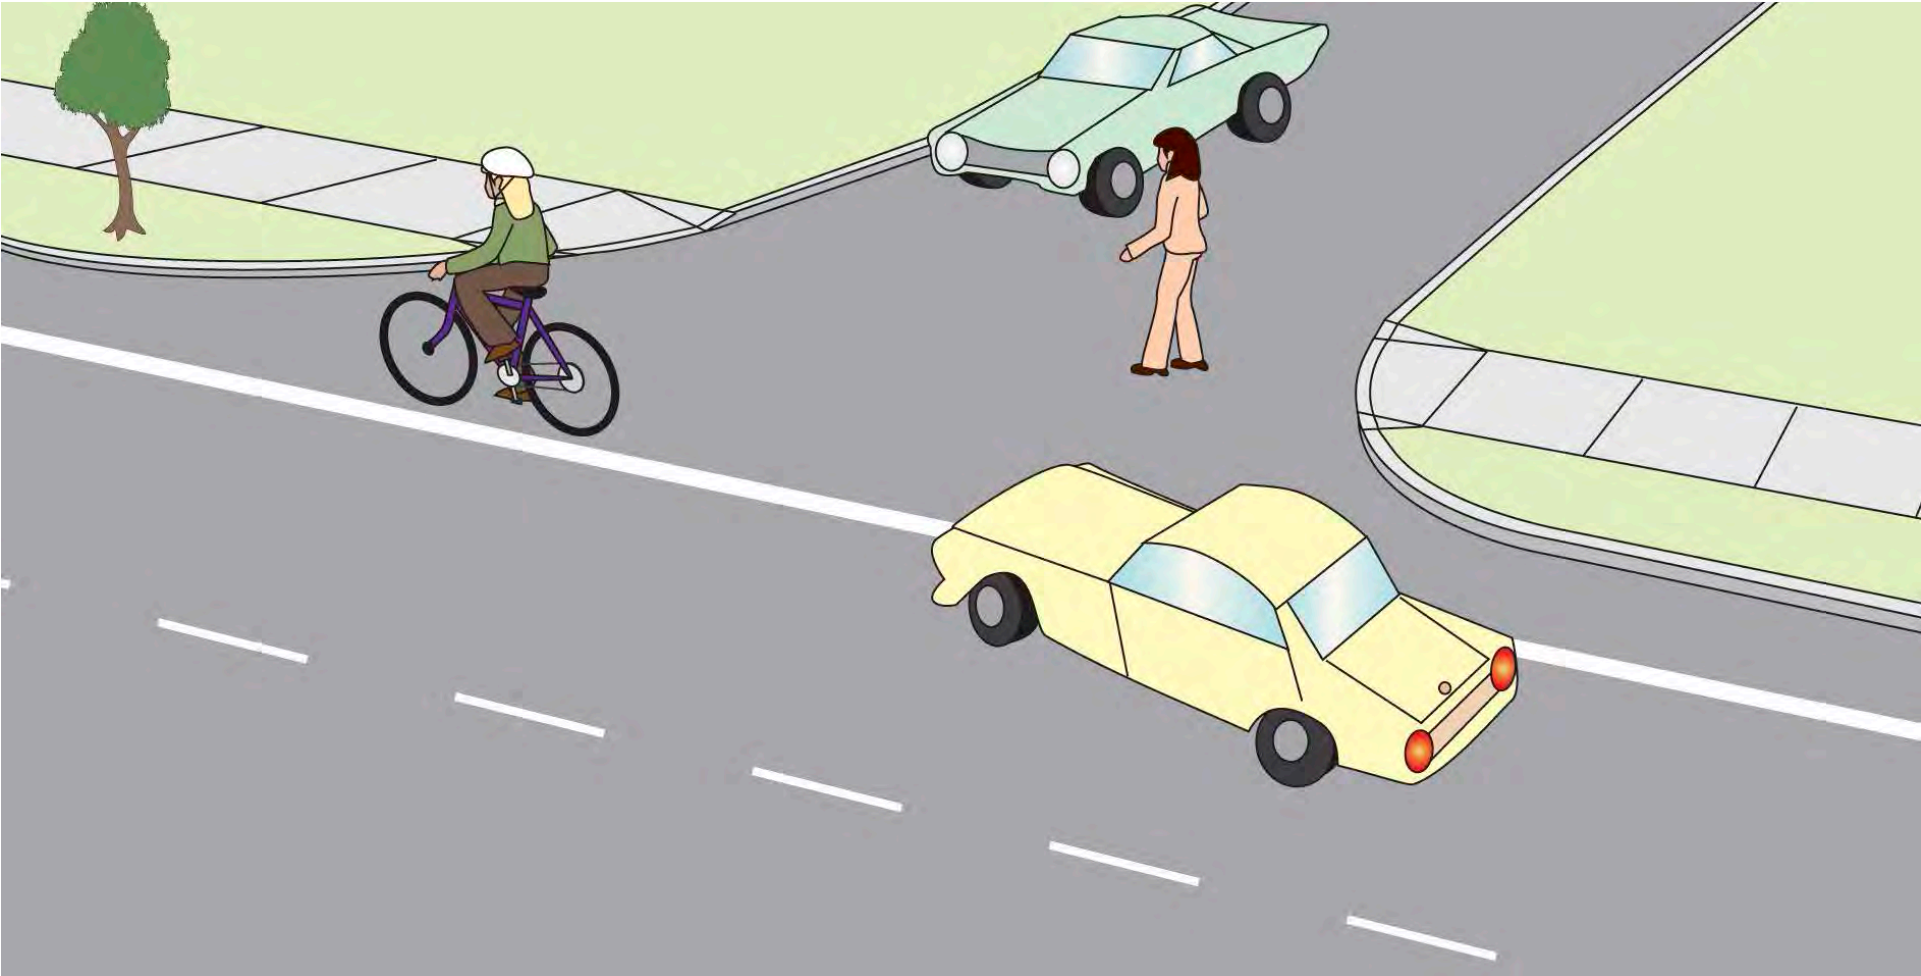

Driveways built like intersections encourage high-speed turns

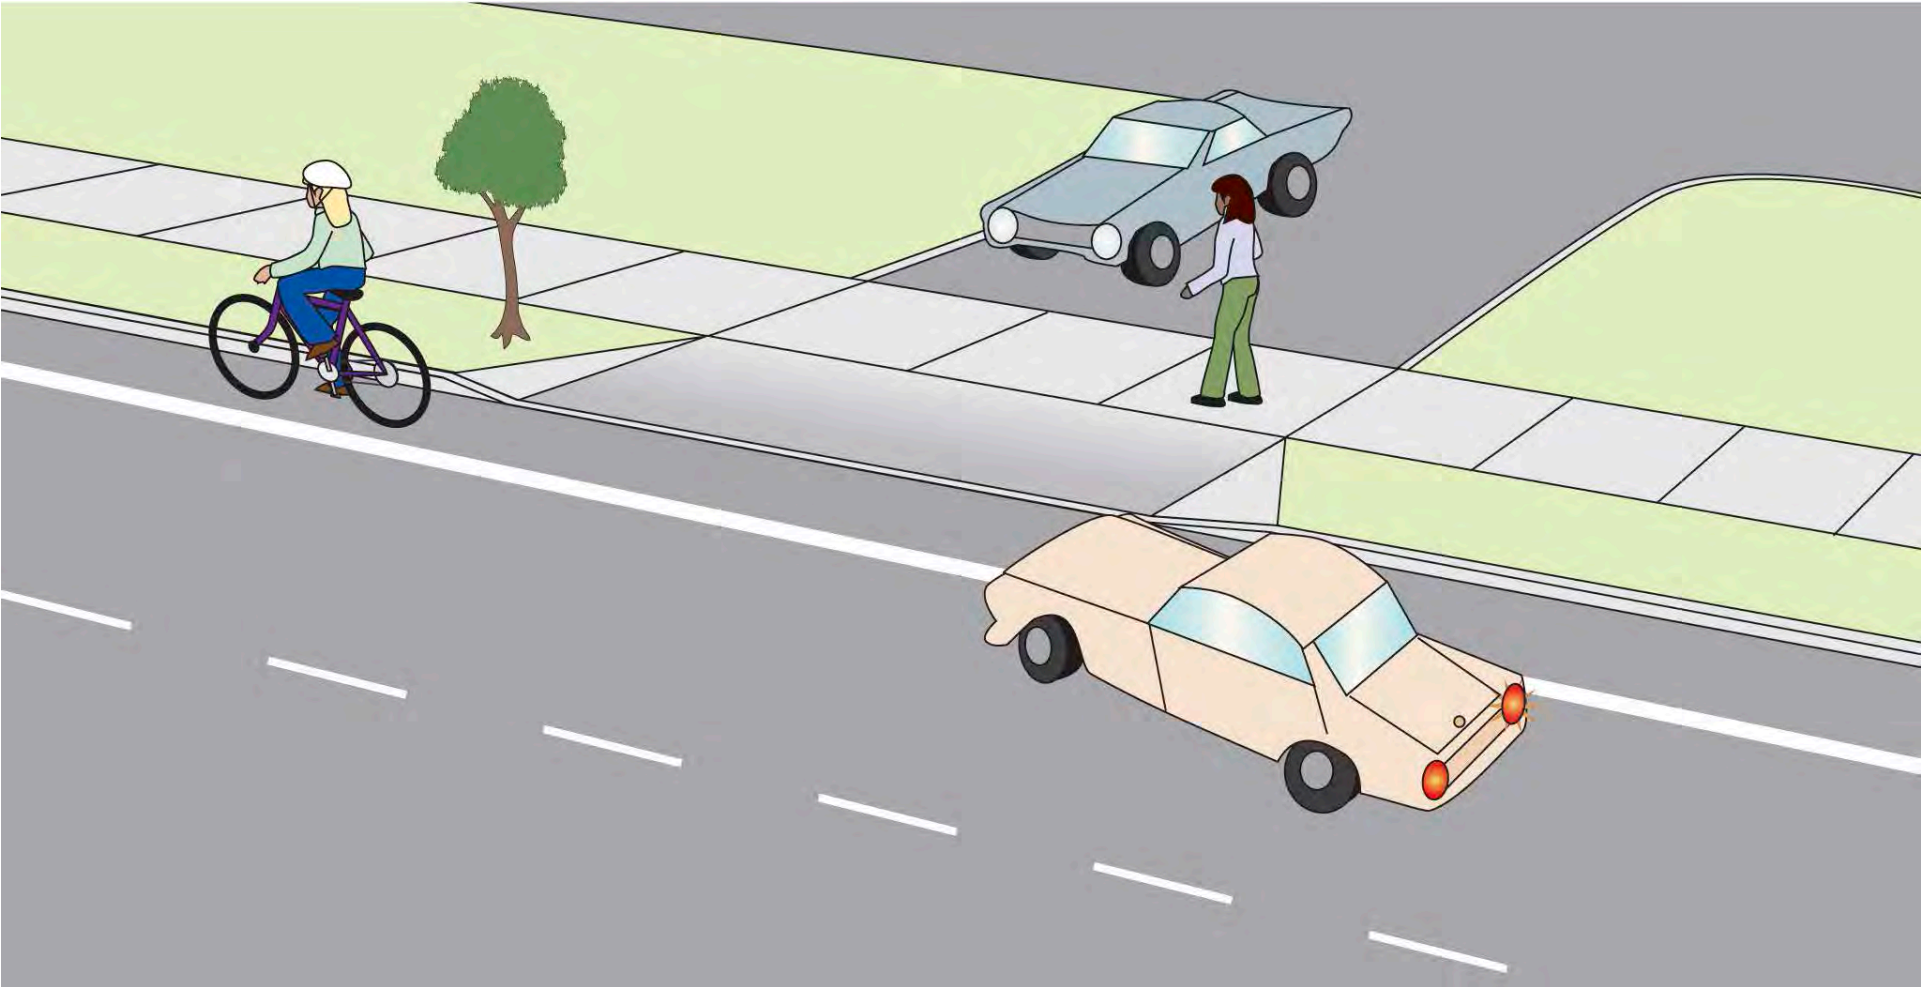




Driveways built like driveways encourage slow-speed turns

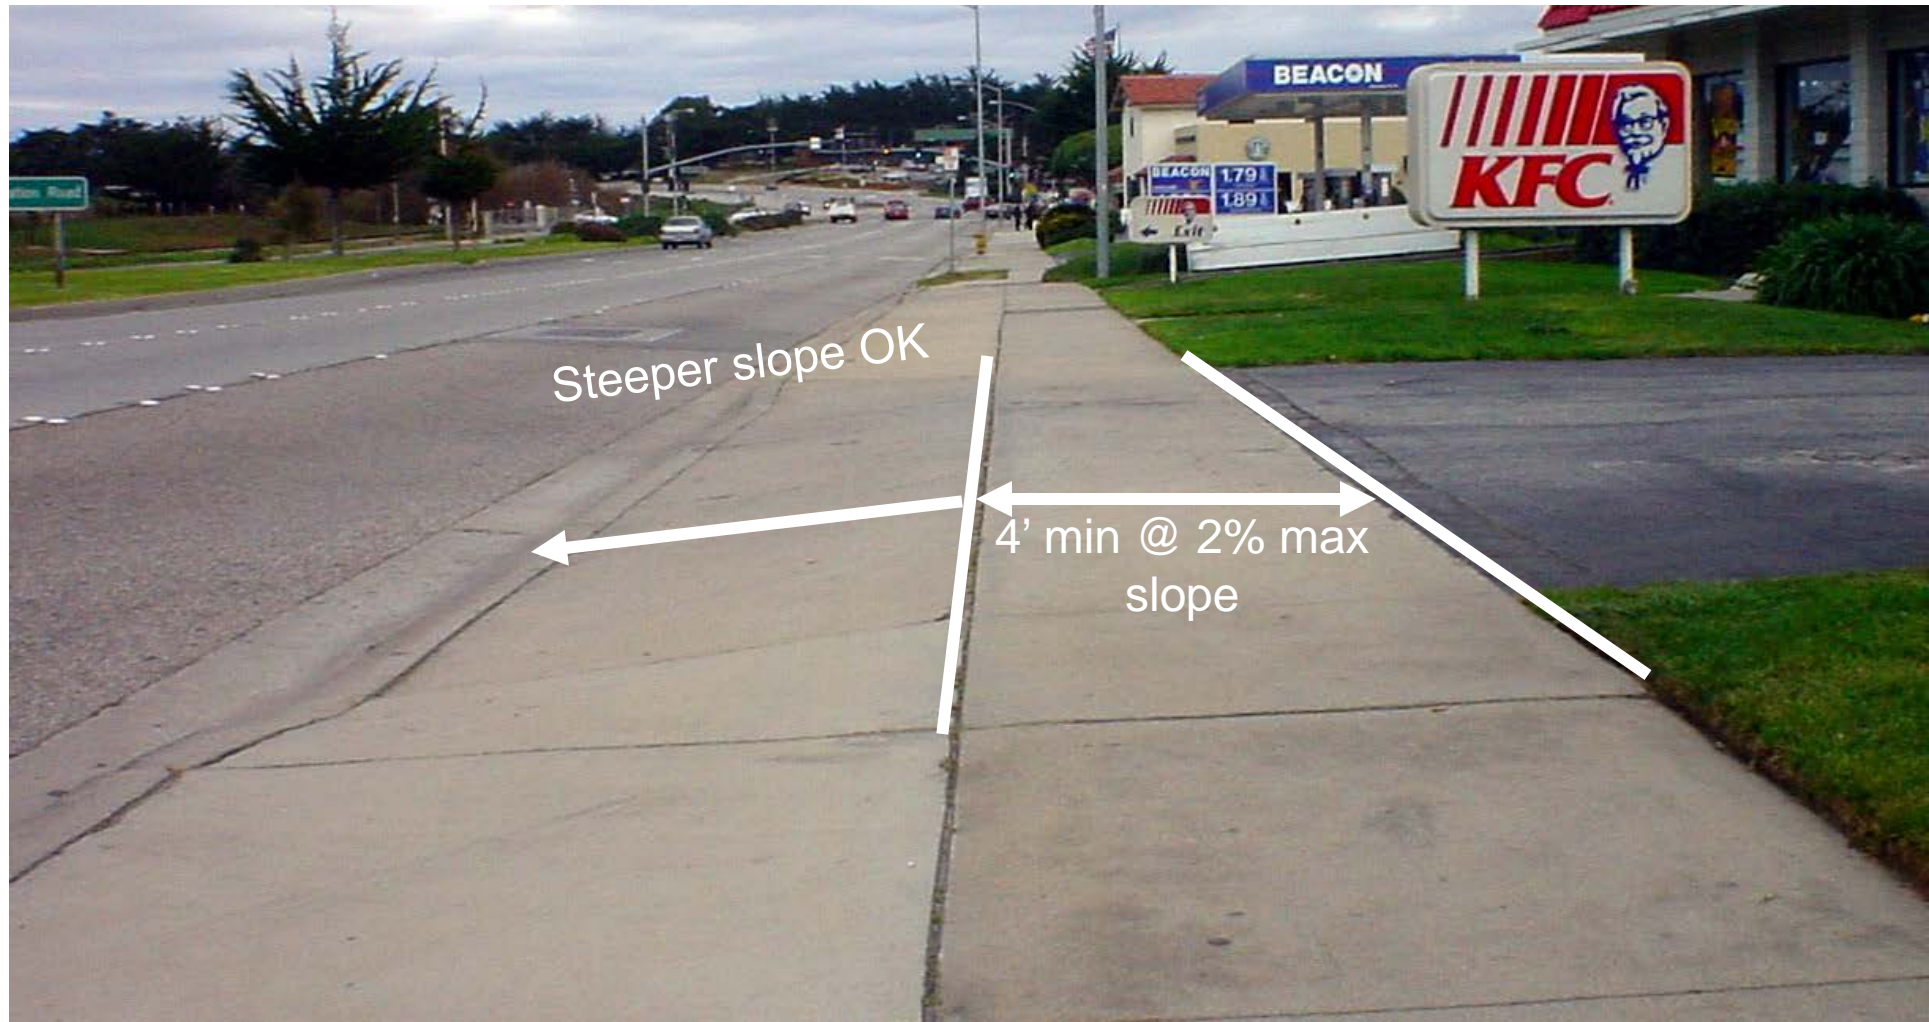

ADA requirements for driveways: minimum pedestrian access route of 3' (soon to be 4') at 2% max cross-slope

DRIVEWAYS

Easier to maintain
level access with
separated
sidewalks

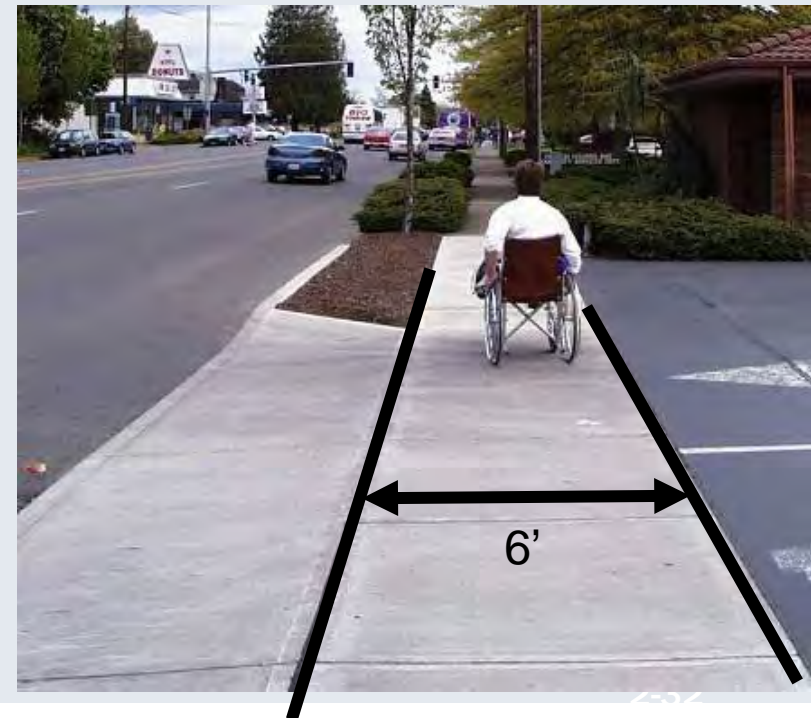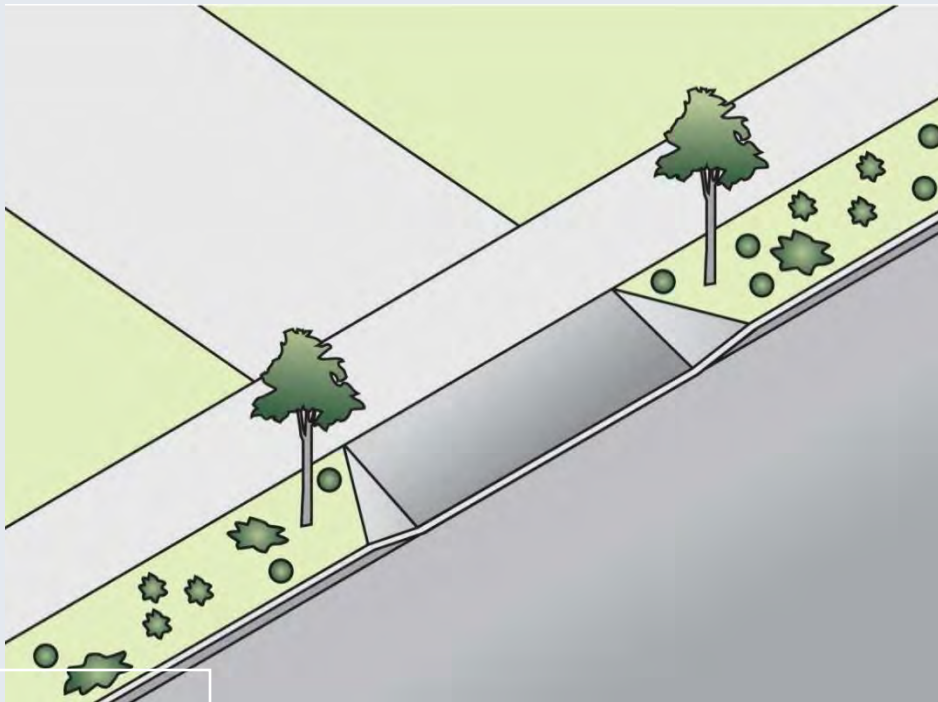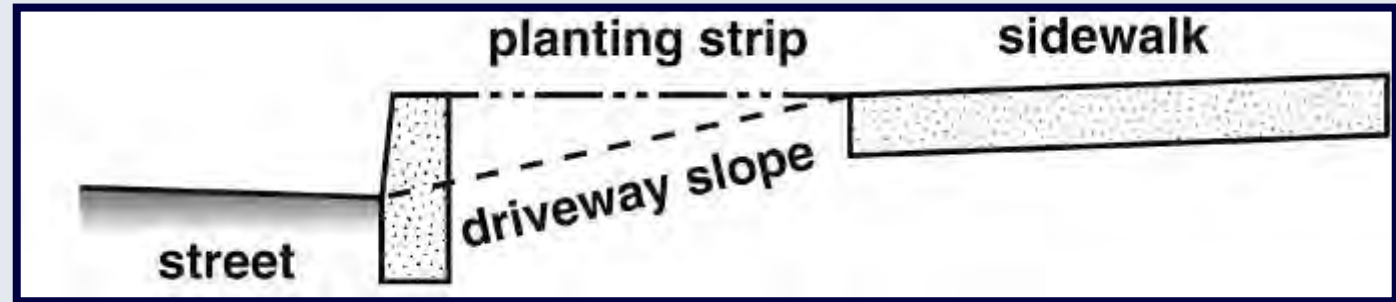


DRIVEWAYS

Driveway Rollercoaster



- Most common reason given by wheelchair users using the street
- Driveways are not flat

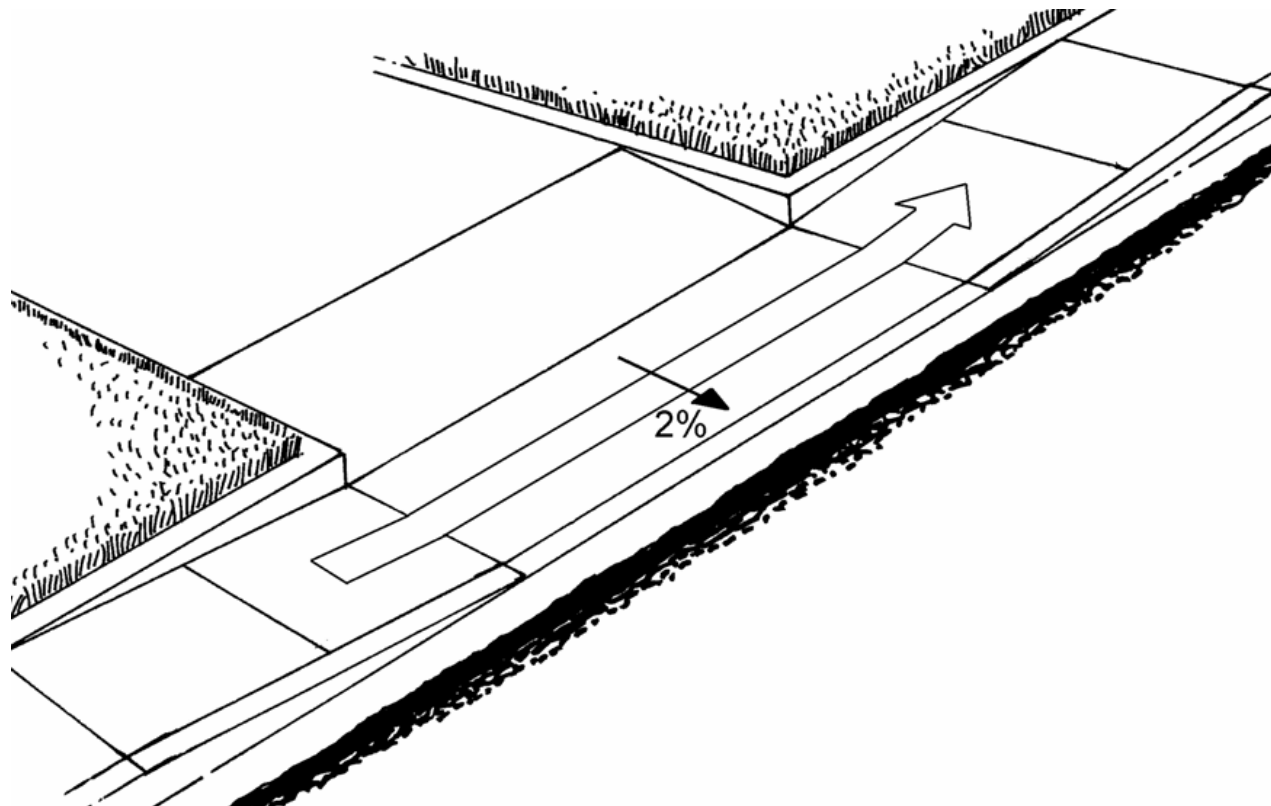

For narrow curbside sidewalks
Fully lowered sidewalk

WALKING ALONG THE ROAD – LET’S RECAP

1. Sidewalk Design: The zone system

What are the 4 zones?

1. The curb zone
2. The furniture/planter/buffer zone
3. The pedestrian/walking zone
4. The frontage zone

WALKING ALONG THE ROAD – LET'S RECAP

2. Sidewalk Design: Key characteristics

How should the walking zone be designed?

- Smooth
- Separated from traffic
- Clear of obstructions
- Level cross-slope (max 2%)
- Wide enough to accommodate expected pedestrian volumes